


Ø15 CLOCK CAM

Universal assembly


With self-expanding bolt, quick assembly. Offered for center drilling 24 or 34 mm. versions and Ø5, Ø8 and Ø10 mm. It can be placed or removed from its housing by hand.

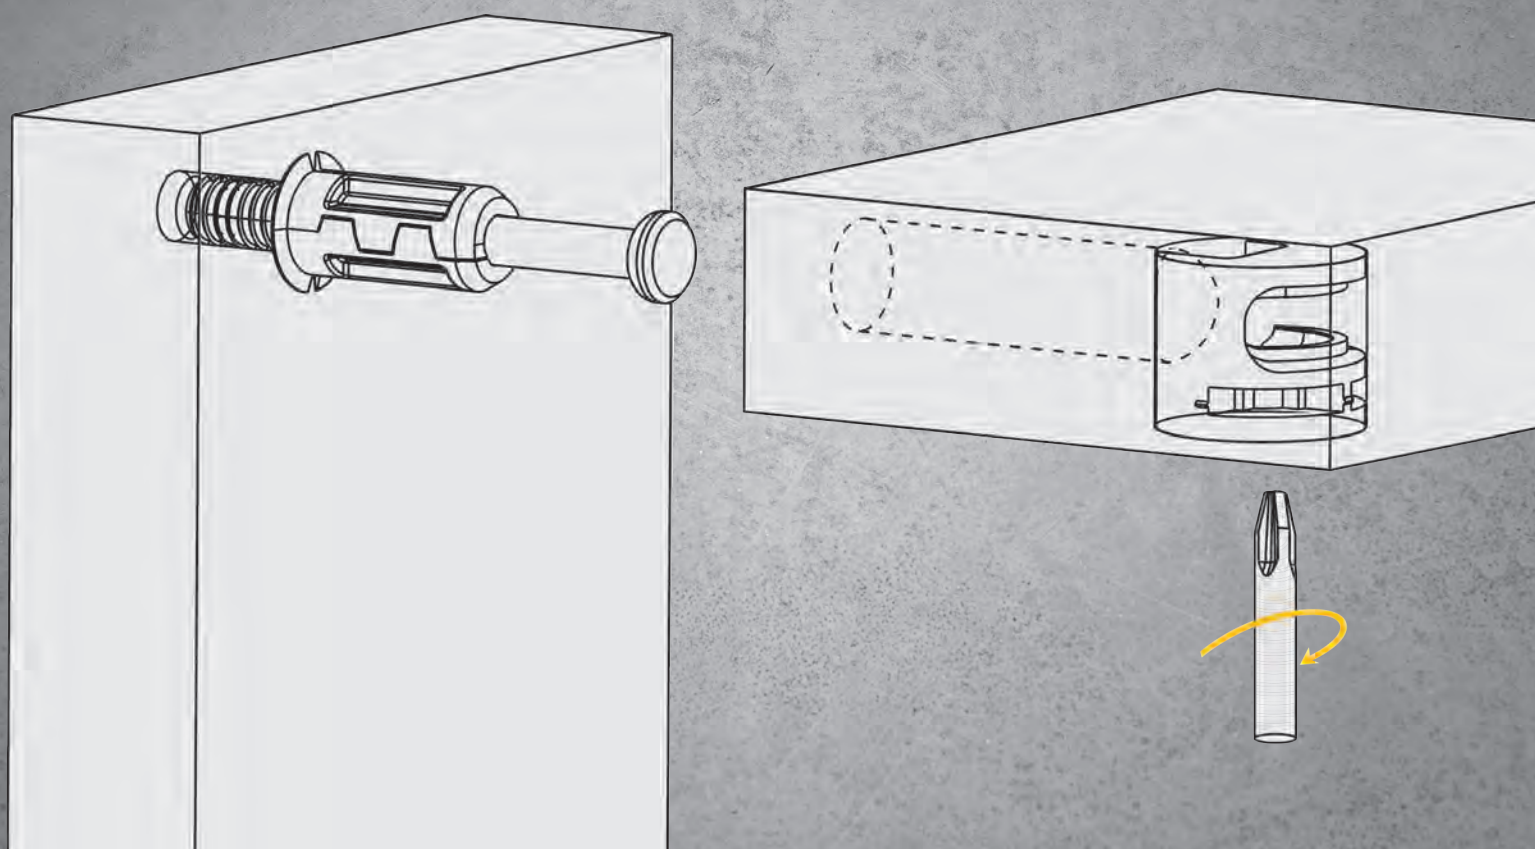


1 CLOCK CAMS AND COVERS




Ø4 mm. cover cap.

			
White	RAL 9003	531.217.002	
Brown	RAL 8016	531.217.013	2.000 or 10.000
Black	RAL 9005	531.217.024	
Nickel-plated		531.217.061	

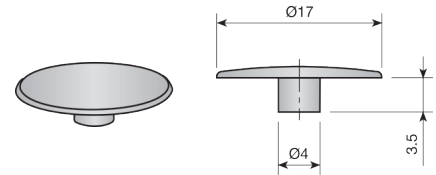





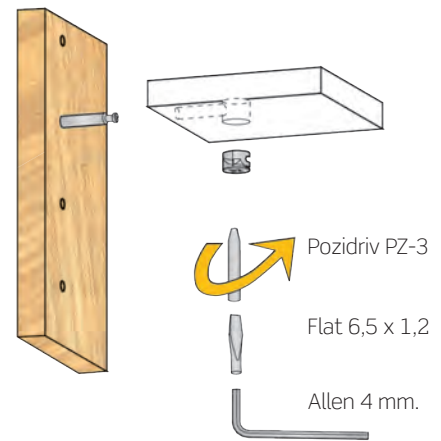


Ø15 mm. clock cam.

Panel thickness	16mm.	19mm.	
C	8mm.	9,5mm.	
Natural	511.108.102	511.195.101	
Black zinc-plated	511.108.043	511.195.042	2.000
Nickel-plated	511.108.065	511.195.064	



The Ø15 mm. clock cam can be used with any of our connecting bolts.



	Wood threaded steel-connecting bolt
	M6 steel connecting bolt
	Self-expanding bolt
	Connecting bolt with safety washer
	Connecting bolt
	Articulated connecting bolt
	90° angle connecting bolt

2 BOLTS

Single bolts



Wood threaded connecting bolt.

	D= 34mm.	
Zinc-plated steel	523.834.032	500

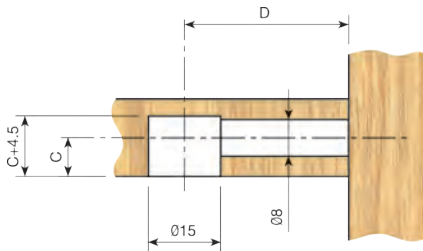

M6 connecting bolt.



	D= 34mm.	
Zinc-plated steel	523.934.036	500

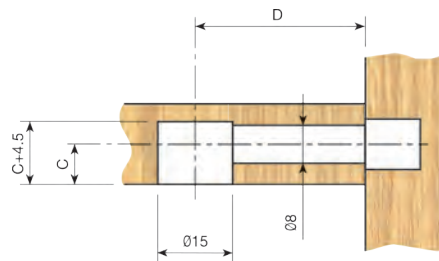

■ Articulated and twin bolts



Articulated bolt.

Zinc-plated	524.144.036	1.000
-------------	-------------	-------

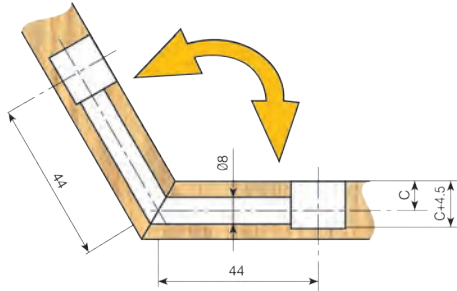



Angle connecting-bolt.

Zinc-plated	D= 34mm. 524.634.036	1.000
-------------	-------------------------	-------

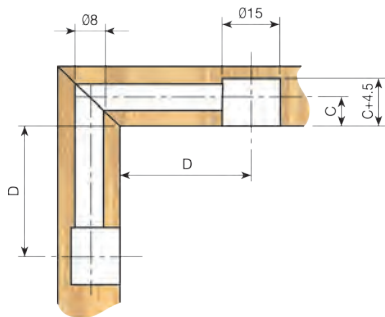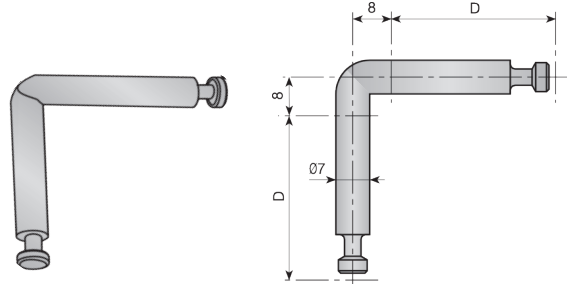



Double-ended connecting bolt.

Zinc-plated	D= 34mm. 524.834.030	1.000
-------------	-------------------------	-------

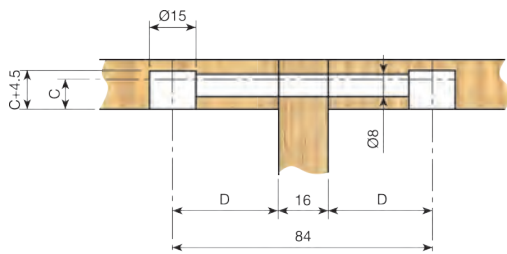

Double-ended connecting bolt with washer.


Zinc-plated	D= 24mm. 524.724.034	1.000
-------------	-------------------------	-------

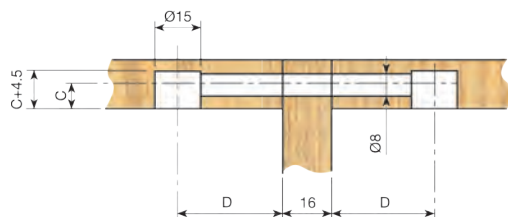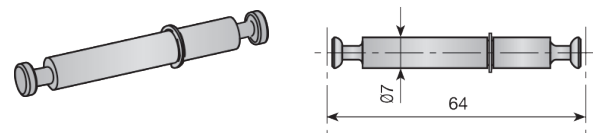



Self-expanding bolts

This bolt gives saves substantial assembly time, for either production Assembly, or for kd furniture. Available for 24 and 34 drilling centres. For 5, 8 or 10mm drilling on the gable end.

Self-expanding bolt.

Natural	Ø5mm.	Ø8mm.	Ø10mm.	
D= 24 mm.	525.224.103	525.324.100	525.424.104	2.000
D= 34 mm.	525.234.102	525.334.106	525.434.103	

It can be fitted or removed from its housing by hand, tool-free.

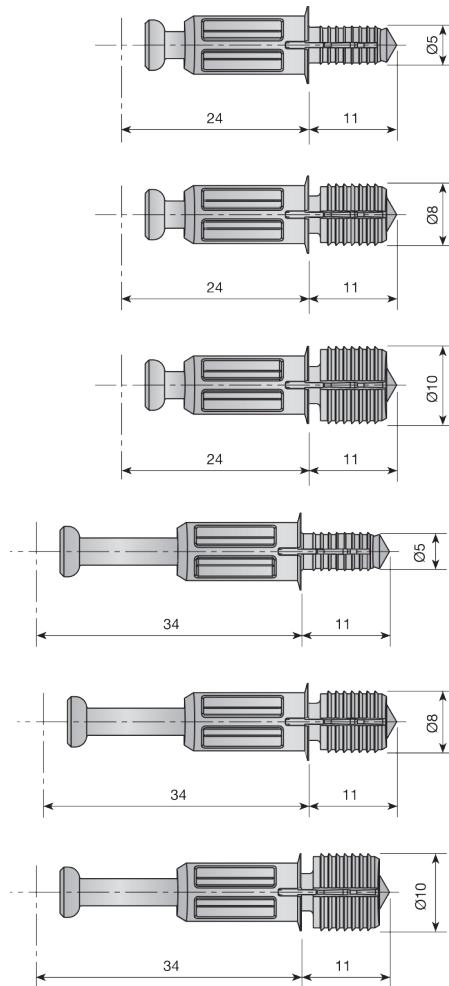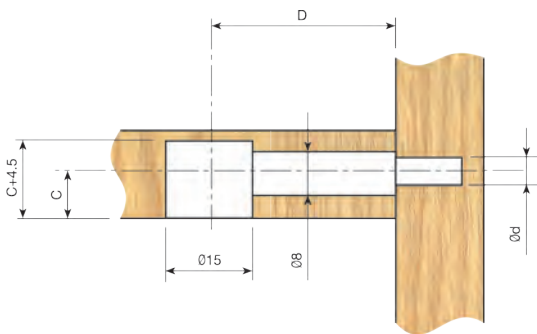

Assembly

When turning the clock cam the rod is moved and the portion housed in the gable end is simultaneously expanded, so strong and efficient interlocking is achieved.

